




CISAILLES HYDRAULIQUES

SÉRIE SC



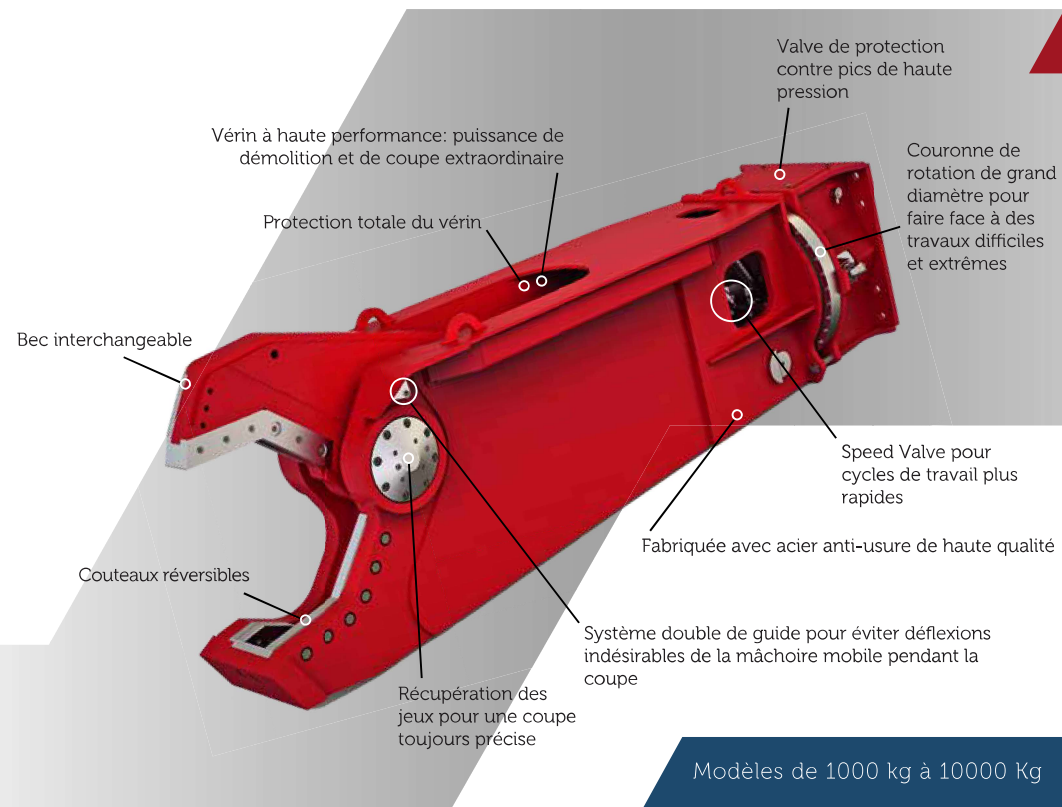


Modèles de 1000 kg à 10000 Kg

S.A.S MANDAMAT
 2020 Route d'Heyrieux
 69360 SAINT-SYMPHORIEN-D'OZON
 Tel : 04.72.76.23.93
 Email: contact@mandamat.com



Caractéristiques techniques		SC1300	SC2200	SC3200	SC4000	SC5000	SC8000	SC10000
Poids cisaille	kg	1310	2270	3260	4170	5100	8100	10330
Poids pelle - flèche	ton	13/20	19/28	27/39	32/45	38/55	70/110	sup. 85
Poids pelle - bras	ton	8/14	14/20	20/30	25/40	30/50	50/80	sup. 60
Ouverture mâchoires (A)	mm	450	480	575	670	740	870	1004
Débit d'huile rotation (min/max)	l/min	20/30	20/30	20/30	20/30	40/50	40/50	80/100
Pression de travail rotation	bar	120	120	120	120	120	120	120
Débit d'huile ouv./ferm.	l/min	150/250	200/300	280/350	350/450	350/500	500/800	700/1000
Pression de travail ouv./ferm.	bar	350	350	350	350	350	350	350
Rotation 360°		hydraulique	hydraulique	hydraulique	hydraulique	hydraulique	hydraulique	hydraulique

Capacités de coupe								
Force à la gorge (F1)	ton	275	400	620	730	890	1200	1320
Force à la pointe (F3)	ton	61	96	146	165	195	240	280

Force de coupe								
	mm	200	300	400	450	500	600	750
	mm	140	200	260	280	320	400	550
	mm	40	55	65	70	75	100	110